



## HCE65R280-S2


650V N-Channel Super Junction Power MOSFET

### ● Features:

- 15.0A, 650V,  $R_{DS(on)(Typ)} = 240m\Omega @ V_{GS}=10V$
- Low Gate Charge
- Low  $C_{rSS}$
- 100% Avalanche Tested
- Fast Switching
- Improved dv/dt Capability

### ● Application:

- High Frequency Switching Mode Power Supply
- Active Power Factor Correction

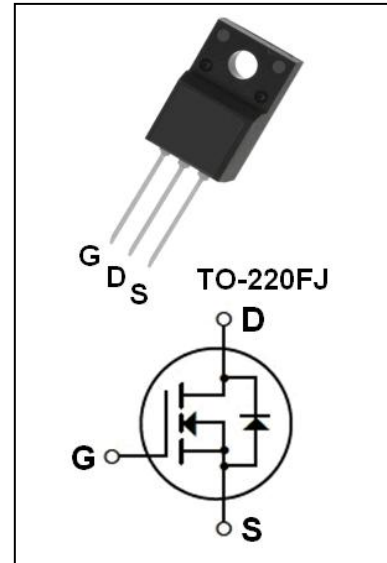

### Absolute Maximum Ratings ( $T_c=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain-Source Voltage	650	V
$I_D$	Drain Current - Continuous ( $T_c=25^\circ C$ ) - Continuous ( $T_c=100^\circ C$ )	15.0*	A
		9.5*	A
$I_{DM}$	Drain Current - Pulsed (Note1)	60*	A
$V_{GSS}$	Gate-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulsed Avalanche Energy (Limit Reference Value) (Note2)	124	mJ
$I_{AR}$	Avalanche Current (Note1)	3.0	A
$E_{AR}$	Repetitive Avalanche Energy (Note1)	3.2	mJ
dv/dt	Peak Diode Recovery dv/dt (Note3)	8.5	V/ns
$P_D$	Power Dissipation ( $T_c = 25^\circ C$ ) - Derate above $25^\circ C$	46	W
		0.37	W/ $^\circ C$
$T_j$	Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55 to +150	$^\circ C$

\* Drain Current Limited by Maximum Junction Temperature.

### Thermal Characteristics

Symbol	Parameter	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	2.72	$^\circ C / W$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	80	$^\circ C / W$



## HCE65R280-S2

650V N-Channel Super Junction Power MOSFET


### Electrical Characteristics(Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
$BV_{DSS}$	Drain-source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	650	--	--	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D=250\mu A$ (Referenced to 25°C)	--	0.62	--	V/°C
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=650V, V_{GS}=0V$	--	--	1	$\mu A$
		$V_{DS}=520V, T_c=125^\circ C$	--	--	10	$\mu A$
$I_{GSSF}$	Gate-Body Leakage Current, Forward	$V_{GS}=+30V, V_{DS}=0V$	--	--	100	nA
$I_{GSSR}$	Gate-Body Leakage Current, Reverse	$V_{GS}=-30V, V_{DS}=0V$	--	--	-100	nA
<b>On Characteristics</b>						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2.3	--	4.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=10V, I_D=7.5A$	--	240	280	m $\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS}=20V, I_D=7.5A$ (Note4)	--	8.2	--	S
<b>Dynamic Characteristics</b>						
$C_{iss}$	Input Capacitance	$V_{DS}=100V, V_{GS}=0V,$ $f=1.0MHz$	--	920	--	pF
$C_{oss}$	Output Capacitance		--	41	--	pF
$C_{rss}$	Reverse Transfer Capacitance		--	1.0	--	pF
<b>Switching Characteristics</b>						
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 325V, I_D = 15.0A,$ $R_G = 25\Omega$ (Note4,5)	--	19.5	--	ns
$t_r$	Turn-On Rise Time		--	45	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	69	--	ns
$t_f$	Turn-Off Fall Time		--	37	--	ns
$Q_g$	Total Gate Charge	$V_{DS} = 520V, I_D = 15.0A,$ $V_{GS} = 10V$ (Note4,5)	--	27	--	nC
$Q_{gs}$	Gate-Source Charge		--	7.5	--	nC
$Q_{gd}$	Gate-Drain Charge		--	12.3	--	nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
$I_S$	Maximum Continuous Drain-Source Diode Forward Current		--	--	15	A
$I_{SM}$	Maximum Pulsed Drain-Source Diode Forward Current		--	--	60	A
$V_{SD}$	Drain-Source Diode Forward Voltage	$V_{GS} = 0V, I_S = 15.0A$	--	--	1.4	V
$t_{rr}$	Reverse Recovery Time	$V_{GS} = 0V, I_S = 15.0A,$ $dI_F/dt = 100A/\mu s$ (Note4)	--	273	--	ns
$Q_{rr}$	Reverse Recovery Charge		--	3.5	--	$\mu C$


Notes:

- 1、Repetitive Rating:Pulse Width Limited by Maximum Junction Temperature.
- 2、L = 25mH,  $I_{AS} = 3.0A, V_{DD} = 100V, R_G = 25\Omega$ , Starting  $T_J = 25^\circ C$ .
- 3、 $I_{SD} \leq 15.0A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ C$ .
- 4、Pulse Test : Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$ .
- 5、Essentially Independent of Operating Temperature.


### On-Regin Characteristics

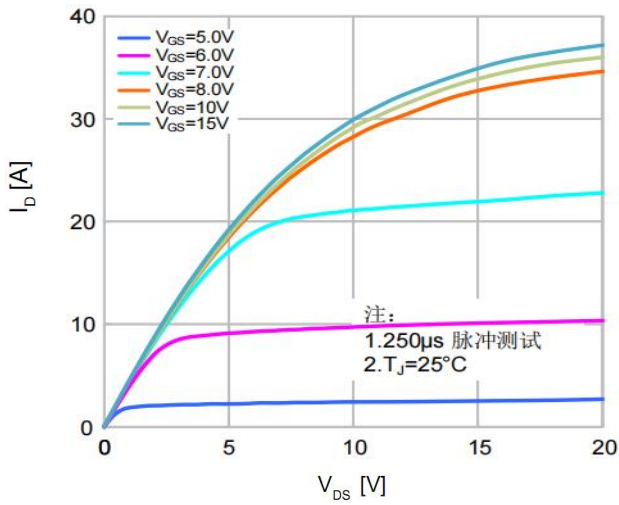


### Transfer Characteristics

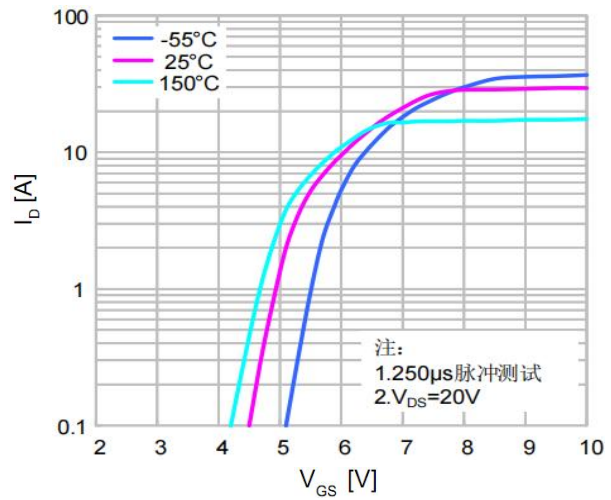


### On-Resistance Variation vs. Drain Current and Gate Voltage

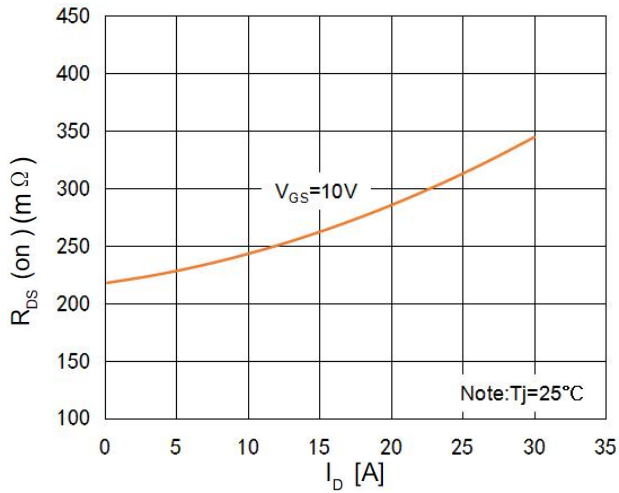


### Body Diode Forward Voltage Variation vs. Source Current and Temperature

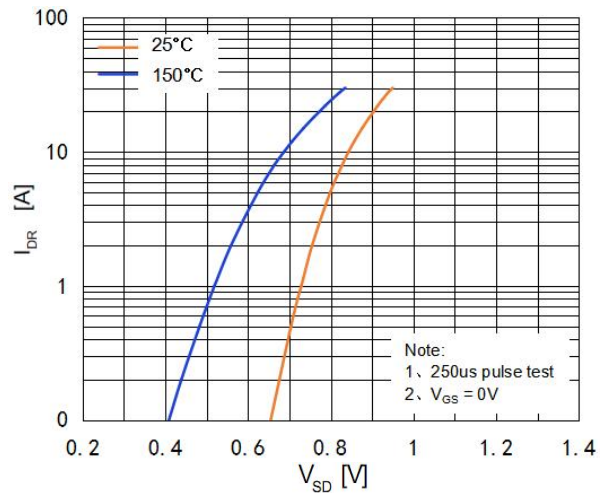

### Capacitance Characteristics

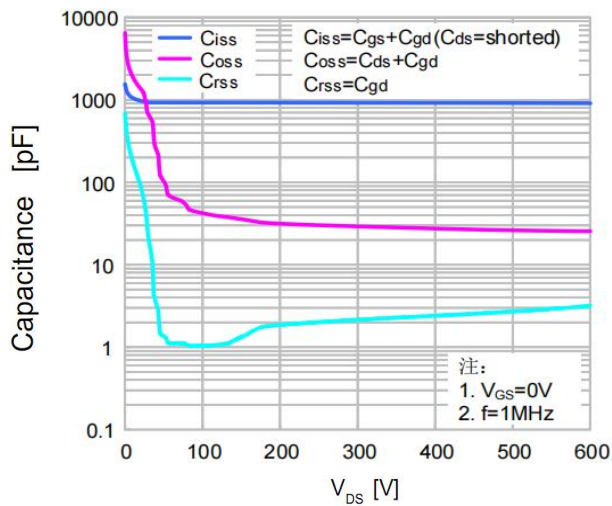

### Gate Charge Characteristics

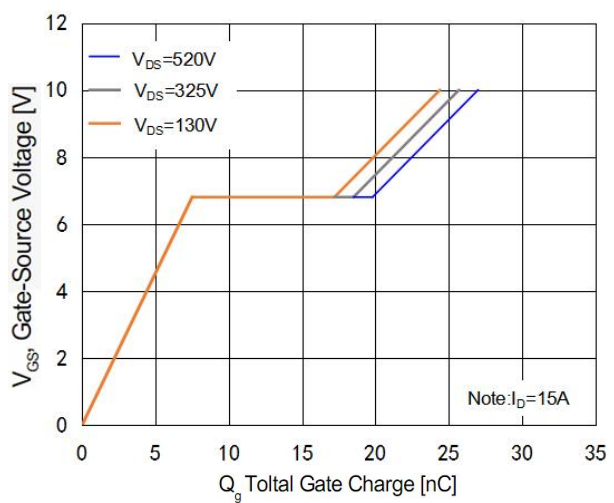





# HCE65R280-S2

## 650V N-Channel Super Junction Power MOSFET


### Breakdown Voltage Variation vs. Temperature

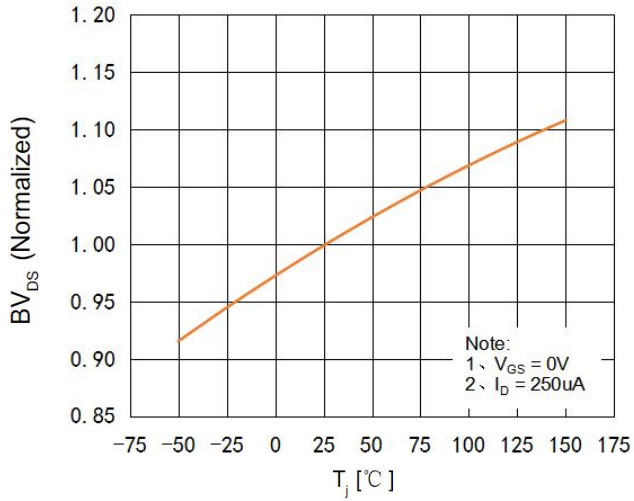


### On-Resistance Variation vs. Temperature

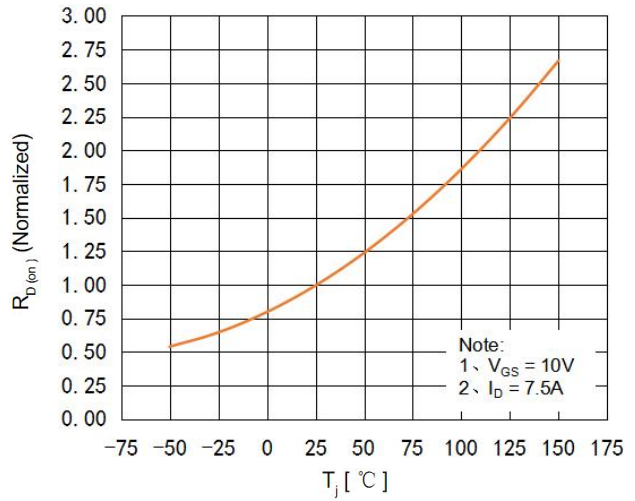

### Maximum Safe Operating Area

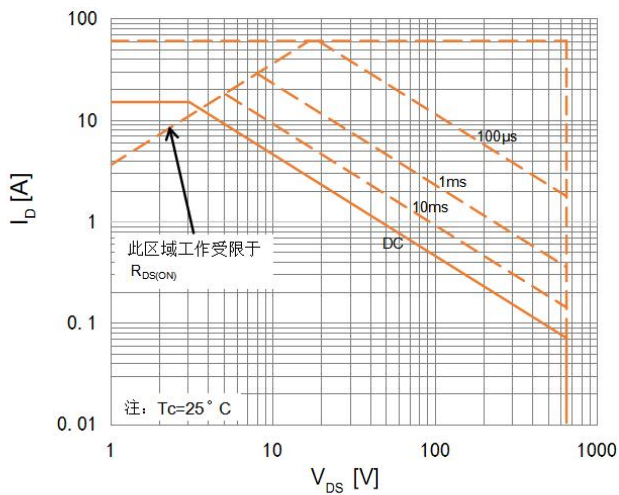

### Maximum Drain Current Vs. Case Temperature

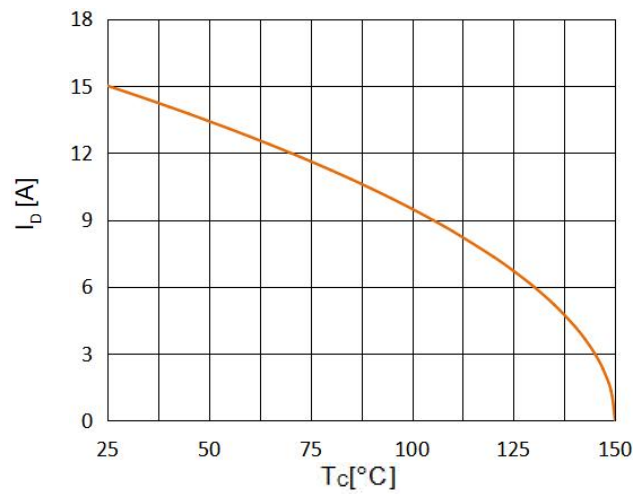




# HCE65R280-S2

650V N-Channel Super Junction Power MOSFET

## TO-220FJ (窄脚) Package Dimensions

UNIT: mm

SYMBOL	min	nom	max	SYMBOL	min	nom	max
A	4.50	4.70	4.90	F3	3.10	3.30	3.50
A1	2.34	2.54	2.74	F4	3.70	3.90	4.10
A2	2.56	2.76	2.93	G1	6.80	7.00	7.20
A3	1.0REF			K1	0.60	0.70	0.80
b	0.60	0.70	0.80	L	11.98	12.98	13.98
b1	0.90	1.00	1.10	L1	-	-	0.95
c	0.40	0.50	0.60	Q	6.50REF		
D	15.47	15.87	16.27	ΦP	2.98	3.18	3.38
D1	12.17	12.57	12.97	ΦP1	3.20	3.40	3.60
e	2.54REF			ΦP2	1.30	1.50	1.70
e1	5.08REF			ΦP3	0.80	1.00	1.20
E	9.86	10.16	10.46	θ 1	3°	5°	7°
E1	9.76	10.06	10.36	θ 2	40°	45°	50°
E2	9.10	9.40	9.70	θ 3	3°	5°	7°
F1	1.30	1.50	1.70	DEF	0.05	0.10	0.20
F2	13.60	13.90	14.20				

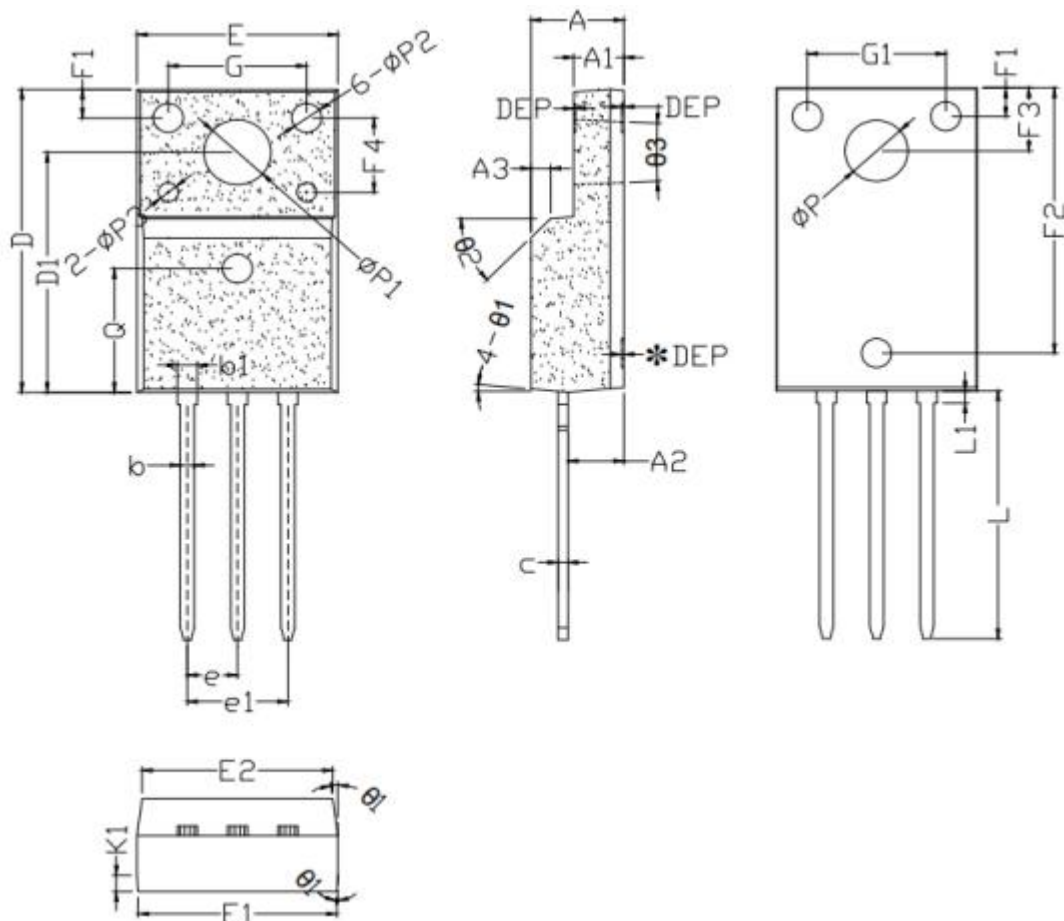



## HCE65R280-S2

650V N-Channel Super Junction Power MOSFET

注意事项:

- 1、在电路设计时请不要超过器件的最大额定值，否则会影响整机的可靠性。
- 2、MOSFET产品为静电敏感型器件，使用时应注意采取防静电保护措施，如佩戴防静电手环、设备接地等。
- 3、如需安装散热片，请注意控制扭力大小及散热片的平整度。
- 4、该规格书由华科公司制作，并可能不定期更改，恕不另行通知。
- 5、如有疑问，请及时联系我司销售代表。

版本履历表:

序号	版本号	修改时间	修改记录
1	V1.0	2023-7-20	首次发行