

**HTT80N06**


60V N-Channel MOSFET

● Features:

- 80A, 60V, $R_{DS(on)(Typ)}$ = 8.0mΩ@ V_{GS} =10V
- Low Gate Charge
- Low C_{rss}
- 100% Avalanche Tested
- Fast Switching
- Improved dv/dt Capability

● Application:

- High Frequency Switching Mode Power Supply
- Active Power Factor Correction

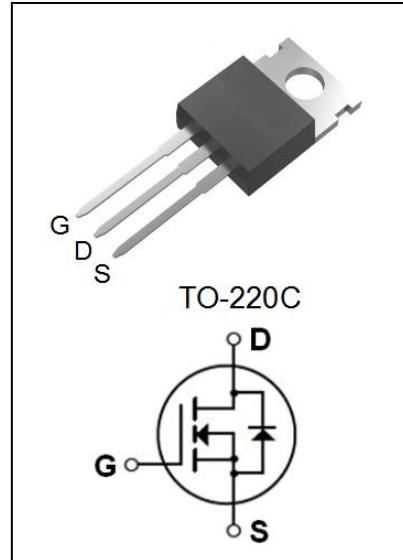**Absolute Maximum Ratings($T_c=25^\circ\text{C}$ unless otherwise noted)**

Symbol	Parameter	Value	Unit
V_{DSS}	Drain-Source Voltage	60	V
I_D	Drain Current - Continuous($T_c=25^\circ\text{C}$)	80*	A
	- Continuous($T_c=100^\circ\text{C}$)	50.6*	A
I_{DM}	Drain Current -Pulsed	240*	A
V_{GSS}	Gate-Source Voltage	± 20	V
E_{AS}	Single Pulsed Avalanche Energy (Limit Reference Value) (Note5)	63	mJ
P_D	Power Dissipation($T_c = 25^\circ\text{C}$) -Derate above 25°C	96	W
		0.77	W/°C
T_j	Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature Range	-55 to +150	°C

Thermal Characteristics

Symbol	Parameter	Max	Unit
$R_{\theta JC}$	Thermal Resistance,Junction to Case (Note2)	1.30	°C /W

**HTT80N06**

60V N-Channel MOSFET

Electrical Characteristics(Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditons	Min	Typ	Max	Unit
Off Characteristics						
BV _{DSS}	Drain-source Breakdown Voltage	V _{GS} =0V , I _D =250μA	60	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =60V, V _{GS} =0V	--	--	1	μA
I _{GSSF}	Gate-Body Leakage Current,Forward	V _{GS} =+20V, V _{DS} =0V	--	--	100	nA
I _{GSSR}	Gate-Body Leakage Current,Reverse	V _{GS} =-20V, V _{DS} =0V	--	--	-100	nA
On Characteristics (Note3)						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D =250μA	1.0	1.7	2.5	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} =10 V, I _D =40A	--	8.0	10.5	mΩ
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} =4.5 V, I _D =40A	--	9.5	13.0	mΩ
Dynamic Characteristics (Note4)						
C _{iss}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1.0MHz	--	1080	--	pF
C _{oss}	Output Capacitance		--	490	--	pF
C _{rss}	Reverse Transfer Capacitance		--	16	--	pF
Switching Characteristics (Note4)						
t _{d(on)}	Turn-On Delay Time	V _{DD} = 30 V, I _D = 15 A, R _G = 3Ω, V _{GS} = 10V	--	8.5	--	ns
t _r	Turn-On Rise Time		--	57	--	ns
t _{d(off)}	Turn-Off Delay Time		--	22	--	ns
t _f	Turn-Off Fall Time		--	9.3	--	ns
Q _g	Total Gate Charge	V _{DS} = 48 V, I _D = 15A, V _{GS} = 10 V	--	18.9	--	nC
Q _{gs}	Gate-Source Charge		--	6.5	--	nC
Q _{gd}	Gate-Drain Charge		--	3.6	--	nC
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Drain-Source Diode Forward Current (Note2)		--	--	80	A
I _{SM}	Maximum Pulsed Drain-Source Diode Forward Current		--	--	240	A
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} = 0V, I _S = 40A (Note3)	--	--	1.4	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0V, I _S = 15A, d I _F / dt = 100A/μs (Note3)	--	61	--	ns
Q _{rr}	Reverse Recovery Charge		--	54	--	nC


Notes:

1. Repetitive Rating:Pulse Width Limited by Maximum Junction Temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test : Pulse Width ≤300 μ s, Duty Cycle≤2%.
4. Guaranteed by design, not subject to production.
5. EAS condition: L = 0.5mH, I_{AS} =12A, V_{DD} = 30V, R_G = 25 Ω, Starting T_J = 25°C.


**HTT80N06**

60V N-Channel MOSFET


On-Region Characteristics

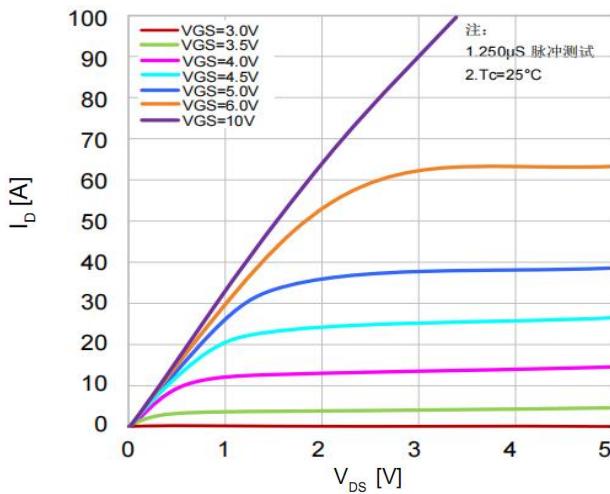


Transfer Characteristics

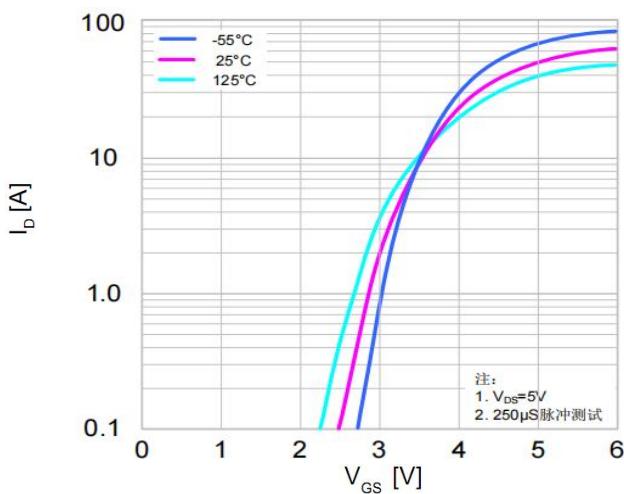


On-Resistance Variation vs. Drain Current and Gate Voltage

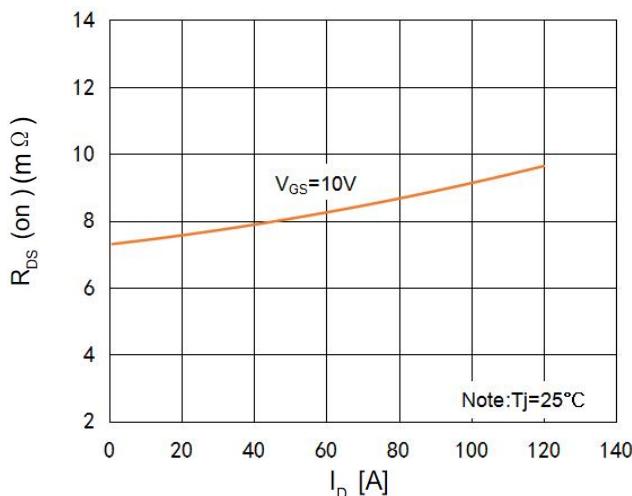


Body Diode Forward Voltage Variation vs. Source Current and Temperature

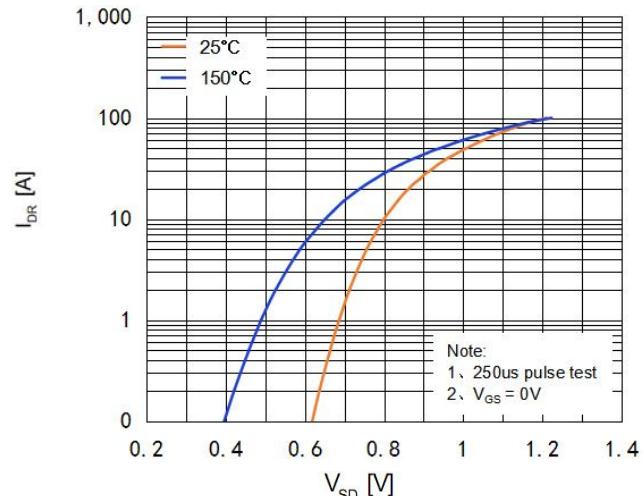

Capacitance Characteristics




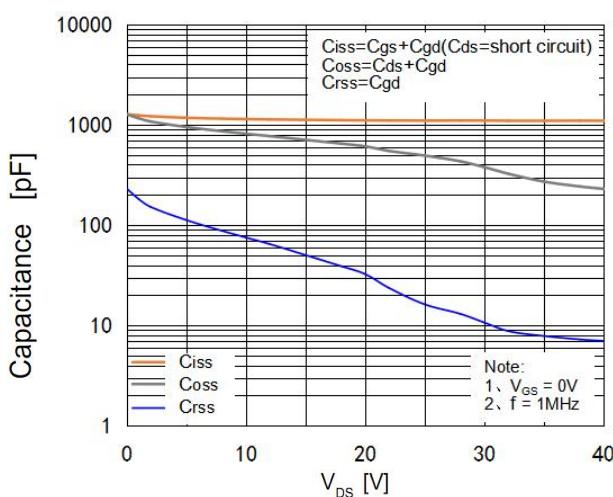


Gate Charge Characteristics

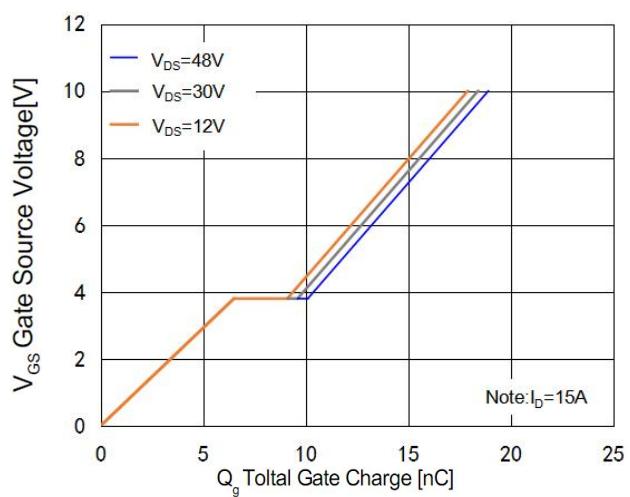

**HTT80N06**

60V N-Channel MOSFET

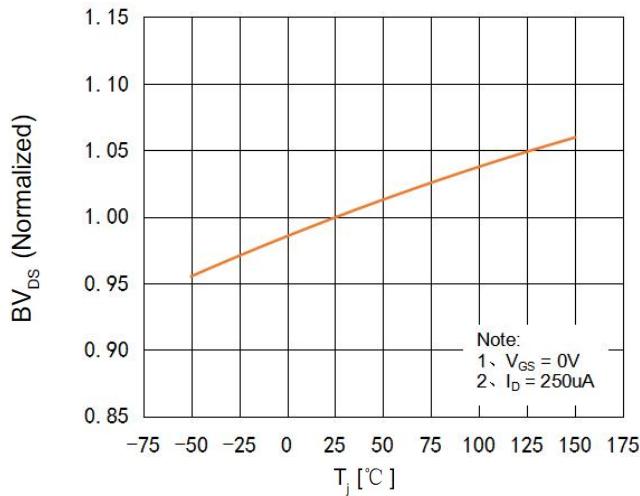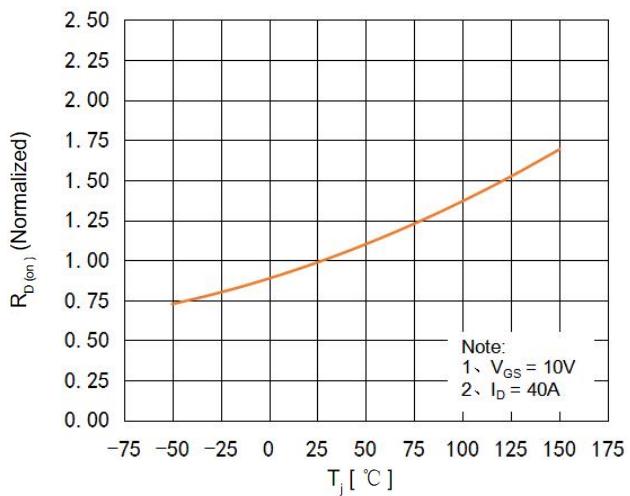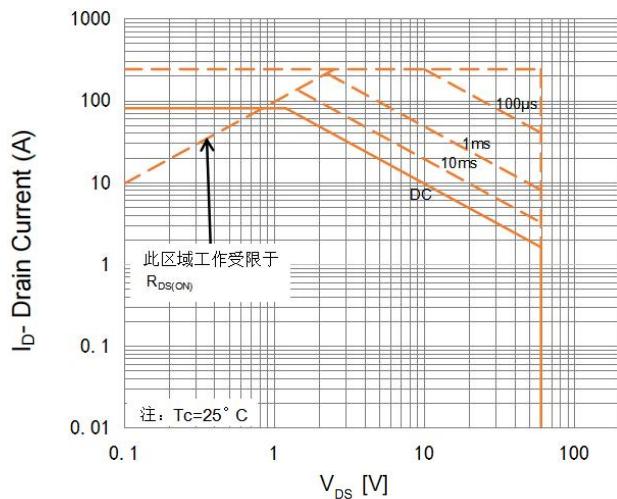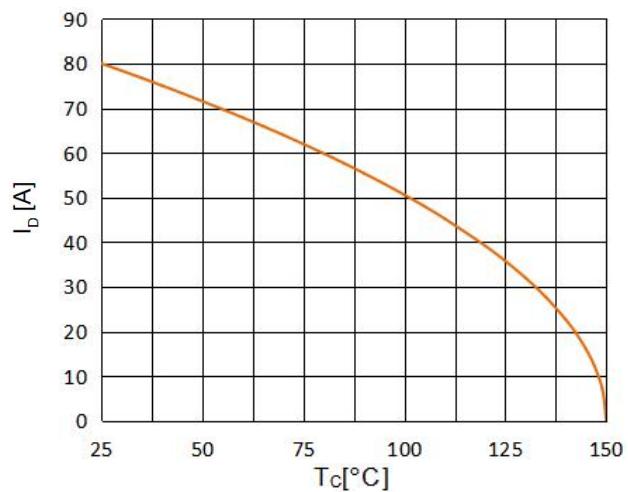**Breakdown Voltage Variation
vs. Temperature****On-Resistance Variation
vs. Temperature****Maximum Safe Operating Area****Maximum Drain Current
Vs. Case Temperature**


**HTT80N06**

60V N-Channel MOSFET

TO-220C Package Dimensions

UNIT: mm

SYMBOL	min	nom	max	SYMBOL	min	nom	max
A	4.00	4.40	4.80	E	9.40	9.90	10.40
B	1.17	1.32	1.47	e		2.54	
B1	0.91	1.06	1.21	F	1.15	1.30	1.45
b1	0.65	0.80	0.95	L	12.00	13.00	14.00
c	0.40	0.50	0.60	L1	2.50	3.00	3.50
D	14.90	15.90	16.90	Q	2.30	2.80	3.30
D1	6.10	6.60	7.10	Q1	1.90	2.40	2.90
W	9.50	10.00	10.50	φP	3.40	3.65	3.90
S		8.30		Z	0		0.20
φH		1.50		N		3 °	
G		0.10		V		3 °	

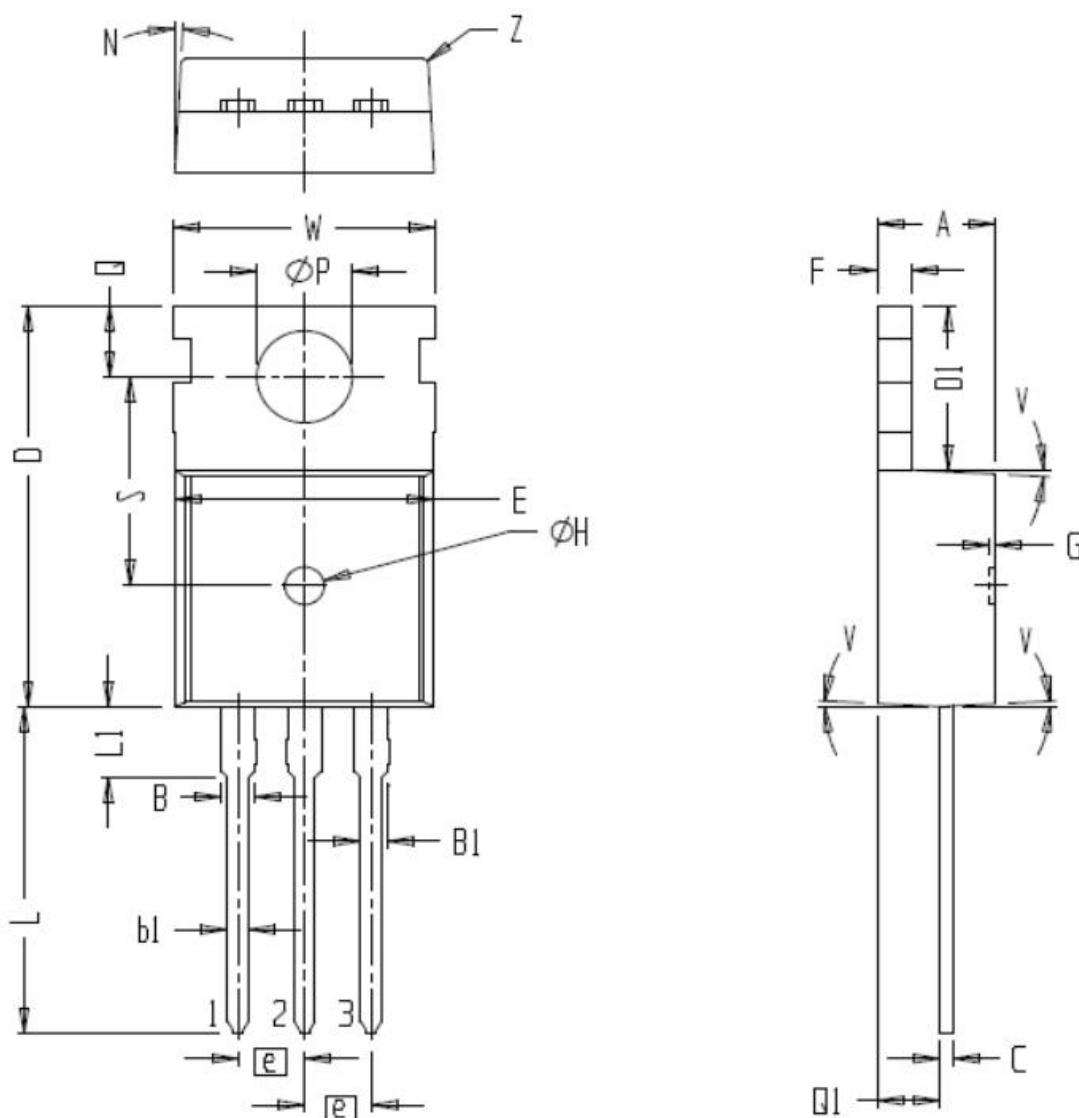



HTT80N06

60V N-Channel MOSFET

注意事项：

- 1、在电路设计时请不要超过器件的最大额定值，否则会影响整机的可靠性。
- 2、MOSFET产品为静电敏感型器件，使用时应注意采取防静电保护措施，如佩戴防静电手环、设备接地等。
- 3、如需安装散热片，请注意控制扭力大小及散热片的平整度。
- 4、该规格书由华科公司制作，并可能不定期更改，恕不另行通知。
- 5、如有疑问，请及时联系我司销售代表。

版本履历表：

序号	版本号	修改时间	修改记录
1	V1.0	2023-9-20	首次发行